




# SFP28 CWDM 20KM Transceiver

APS8CxxB53xDL20

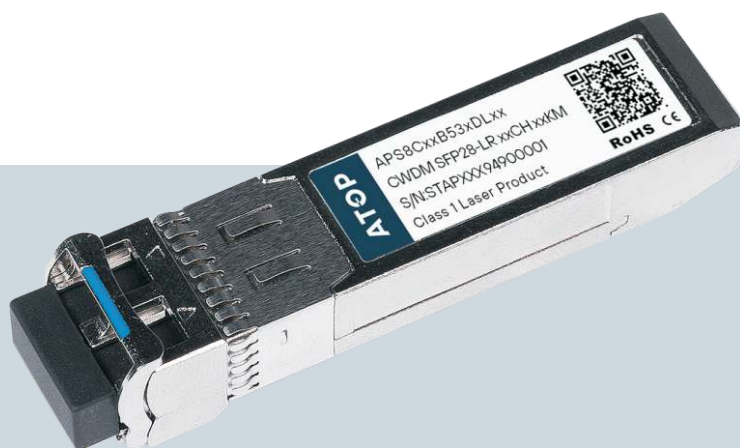

# SFP28 CWDM 20KM Transceiver

## APS8CxxB53xDL20

ATOP's APS8CxxB53xDL20 single-mode transceiver is SFP28 module for duplex optical data communications support up to 25.78Gb/s. It is with the SFP+ 20-pin connector to allow hot plug capability. Digital diagnostic functions are available via an I<sup>2</sup>C. It has built-in clock and data recovery (CDR). This module is designed for single-mode fiber and operates at a nominal wavelength of CWDM (1271~1331nm).

### Product Features

- ✓ Duplex LC connector
- ✓ Hot-pluggable SFP28 footprint
- ✓ Operating data rate up to 25.78Gbps
- ✓ Uncooled 1271~1331nm DFB laser
- ✓ RoHS compliant and Lead Free
- ✓ Distance up to 20km on 9/125um SMF
- ✓ Metal enclosure for lower EMI
- ✓ Power dissipation <1.2W(-5~+70°C), <1.8W(-40~+85°C)
- ✓ Commercial / Industrial operating temperature optional

### Applications

- ✓ 10G&25GBASE Ethernet
- ✓ eCPRI & CPRI



## Product Selection

Part Number	Operating Case temperature	DDMI
APS8CxxB53CDL20	Commercial (-5~70°C)	Yes
APS8CxxB53IDL20	Industrial (-40~85°C)	Yes

## Product Channel Selection

Part Number	Center Wavelength	Data Rate	Distance
APS8C27B53xDL20	1271nm	25.78G	20KM
APS8C29B53xDL20	1291nm	25.78G	20KM
APS8C31B53xDL20	1311nm	25.78G	20KM
APS8C33B53xDL20	1331nm	25.78G	20KM

## Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883 Method 3015
- ESD to the Duplex LC Receptacle: compatible with EN 61000-4-2
- Immunity compatible with EN 61000-4-3
- EMI compatible with FCC Part 15 Class B
- Laser Eye Safety compatible with FDA 21CFR 1040.10 and 1040.11 IEC 60950, IEC60825-1,2
- RoHS compliant with RoHS 2.0(2015/863/EU)-amending.


## Pin Descriptions

Pin	Symbol	Name	Ref.
1	VeeT	Transmitter Ground (Common with Receiver Ground)	1
2	TX Fault	Transmitter Fault. LVTTTL-O	2
3	TX Disable	Transmitter Disable. Laser output disabled on high or open. LVTTTL-I	3
4	SDA	2-Wire Serial Interface Data Line (Same as MOD-DEF2 in INF-8074i). LVTTTL-I/O	2
5	SCL	2-Wire Serial Interface Data Line (Same as MOD-DEF2 in INF-8074i). LVTTTL-I	2
6	Mod_ ABS	Module Absent, Connect to VeeT or VeeR in Module.	2
7	RS0	Rate Select 0, optionally controls SFP+ module receiver . LVTTTL-I	4
8	LOS	Loss of Signal indication. Logic 0 indicates normal operation. LVTTTL-O	5
9	RS1	Rate Select 1, optionally controls SFP+ module transmitter. LVTTTL-I	4
10	VeeR	Receiver Ground (Common with Transmitter Ground)	1
11	VeeR	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Inverted DATA out. AC Coupled. CML-O	
13	RD+	Receiver Non-inverted DATA out. AC Coupled. CML-O	

14	VeeR	Receiver Ground (Common with Transmitter Ground)	1
15	VccR	Receiver Power Supply	6
16	VccT	Transmitter Power Supply	6
17	VeeT	Transmitter Ground (Common with Receiver Ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled. CML- I	
19	TD-	Transmitter Inverted DATA in. AC Coupled. CML- I	
20	VeeT	Transmitter Ground (Common with Receiver Ground)	1


## Note

1. Circuit ground is internally isolated from chassis ground.
2. TX Fault is an open collector/drain output .Which should be pulled up with a 4.7K – 10K Ohms resistor on the host board if intended for use. Pull up voltage should be between 2.0V to Vcc+0.3V.A high output indicates a transmitter fault caused by either the tx bias current or the tx output power exceeding the preset alarm thresholds. A low output indicates normal operation .In the low state, the output is pulled to <0.8V.
3. Laser output disabled on TX Disable >2.0V or open, enabled on TX Disable<0.8V.
4. Internally pulled down per SFF-8431 Rev4.1.
5. LOS is open collector output. Should be pulled up with 4.7k – 10kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
6. Internally connected.

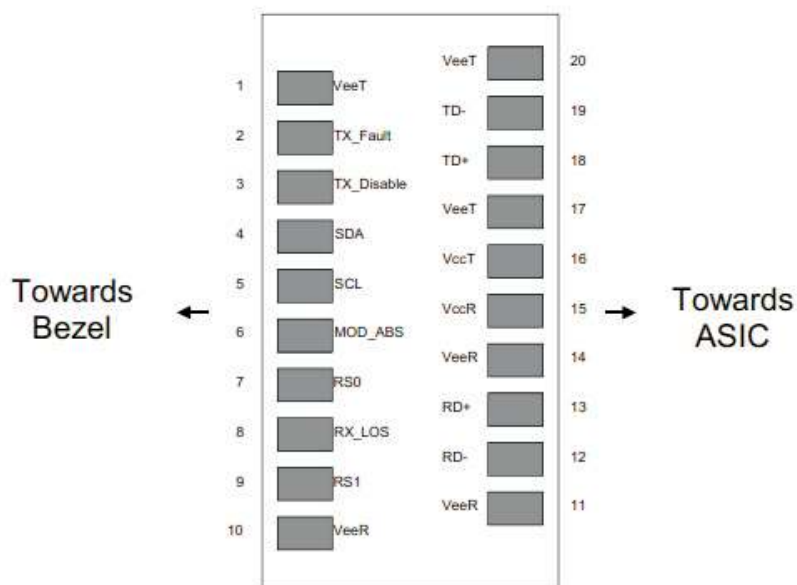

Pin-out of Connector Block on Host Board

## Recommend Circuit Schematic

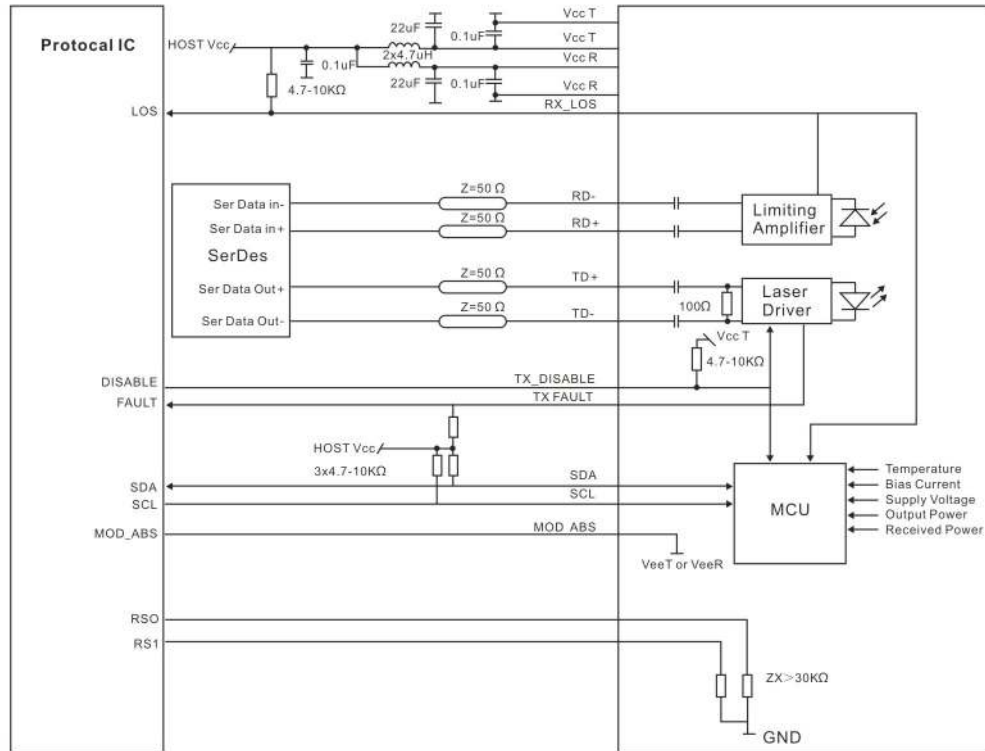

## Absolute Maximum Ratings

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Maximum Supply Voltage	Vcc	-0.5		+4.0	V	
Storage Temperature	TS	-40		+85	°C	
Operating Humidity	RH	0		85	%	

## Recommended Operating Conditions

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Power Supply Voltage	Vcc	3.13	3.30	3.47	V	
Power Supply Current	Icc			340	mA	Commercial
				510	mA	Industrial
Case Operating Temperature	Tc	-5		+70	°C	Commercial
				+85	°C	Industrial
Data Rate(Gigabit Ethernet)	BR		25.78		Gbps	
9/125um G.652 SMF	Lmax			20	km	

## Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
<b>Transmitter</b>						
Input differential impedance	Rin	90	100	110	$\Omega$	1
Differential data input swing	Vin, pp	200		850	mV	
TX Disable-High		Vcc - 1.3		Vcc+ 0.3	V	
TX Disable-Low		Vee		Vee+ 0.8	V	
TX Fault-High		Vcc-0.9		Vcc+ 0.3	V	
TX Fault-Low		0		Vee+0.8	V	
<b>Receiver</b>						
Differential data output swing	Vout, pp	300		850	mV	2
LOS-High		Vcc-0.9		Vcc+ 0.3	V	
LOS-Low		Vee		Vee+0.4	V	

### Notes:

1. AC coupled.
2. Into 100 ohm differential termination.

## Optical Characteristics


Parameter	Symbol	Min	Typ	Max	Unit	Ref.
<b>Transmitter</b>						
Output Opt. Power	PO	0		+6	dBm	
Optical Wavelength	$\lambda$	$\lambda-6.5$		$\lambda+6.5$	nm	
Side-Mode Suppression Ratio	SMSR	30			dB	
Spectral Width(-20dB)	$\sigma$			1	nm	
Optical Extinction Ratio	ER	3.5			dB	
Transmitter Dispersion Penalty	TDP			4.5	dB	
Relative Intensity Noise	RIN			-128	dB/Hz	
<b>Receiver</b>						
RX Sensitivity @25.78Gb/s	SEN			-19	dBm	1
RX Sensitivity OMA@25.78Gb/s	SEN			-18.8	dBm	2
Receiver Overload		-4			dBm	
Optical Center Wavelength	$\lambda_C$	1260		1340	nm	
LOS De-Assert	LOSD			-22	dBm	
LOS Assert	LOSA	-38			dBm	
LOS Hysteresis		0.5		6	dB	

### Notes:

1. Measured with data rate at 25.78Gb/s, BER less than  $5E-5$  with PRBS  $2^{31}-1$ . This value is informative and not the principal indicator of signal strength. A received power below this value cannot be compliant; however, a value above this does not ensure compliance.
2. Measured with data rate at 25.78Gb/s, BER less than  $5E-5$  with PRBS  $2^{31}-1$ .

## Mechanical Specifications


- ATOP's Small Form Factor Pluggable (SFP28) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA) , dimensions are in mm.

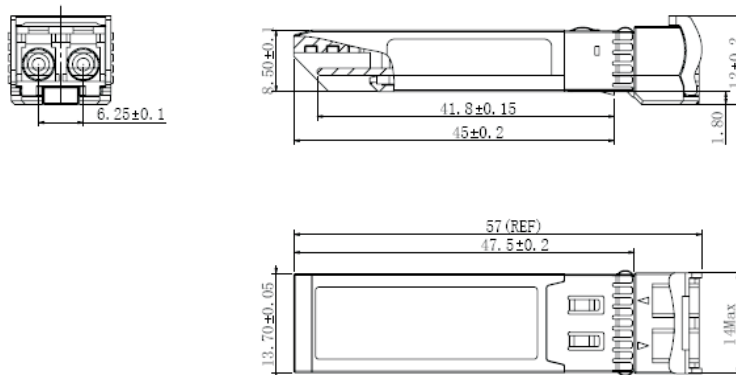

APS8CxxB53xDL20

## EEPROM Information

- EEPROM memory map specific data field description is as below:

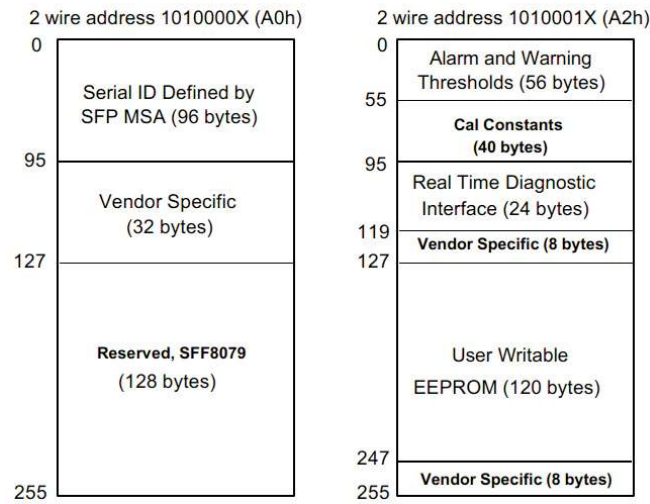

## Digital Diagnostic Monitoring Interface

Five transceiver parameter values are monitored. The following table defines the monitored parameter's accuracy.

Parameter	Range	Accuracy	Calibration
Temperature	-5to +70°C (C)	±3°C	Internal
	-40to +85°C (I)	±3°C	Internal
Voltage	3.13 to 3.47V	±3%	Internal
Bias Current	5 to 80mA	±10%	Internal
TX Power	0 to +6dBm	±3dB	Internal
RX Power	-19 to -4dBm	±3dB	Internal

## Revision History

Revision	Initiated	Reviewed	Approved	DCN	Release Date
Version1.0	TangZhiqiang	XiongWeilin	DingZheng	New Released.	July 11,2019
Version1.1	TangZhiqiang	XiongWeilin	DingZheng	Update the new template	Dec19,2019





let's make it personal  
[www.atoptechnology.com](http://www.atoptechnology.com)